

# SUPPLEMENTARY MATERIAL

## DECODING THE FEATURES OF BIOCHEMICAL MULTISTEP ELECTRON-TRANSFER PATHWAYS WITH THE TWO-STEP DOUBLE- REGENERATIVE ELECTROCHEMICAL MECHANISM IN SQUARE-WAVE VOLTAMMETRY

**Rubin Gulaboski**


*Faculty of Medical Sciences, Goce Delčev University, Štip, North Macedonia*

rubin.gulaboski@ugd.edu.mk

Two-step Double-regenerative EC<sup>c</sup>EC<sup>m</sup> Mechanism in SWV

$$\begin{aligned} E_{sI} &:= -0.4 \quad \Delta E := 1 \quad dE := 0.01 \quad E_{sw} := 0.05 \quad f := 10 \quad E_{sII} := -0.7 \quad r := 1..1 \\ n &:= 1 \quad F_{sw} := 96500 \quad R_{sw} := 8.314 \quad T_{sw} := 298.15 \quad \alpha_1 := 0.5 \\ j &:= 1.. \frac{\Delta E}{dE} \cdot 50 \quad ks_1 := 0.1 \quad \alpha_2 := 0.5 \quad ks_2 := 0.1 \quad D := 0.000005 \end{aligned}$$

$$\begin{aligned} \text{potI}_j &:= (E_{sI} + E_{sw}) + \left[ \left( \text{ceil} \left( \frac{j-1}{25} \right) \cdot dE + \text{if} \left( \frac{\text{ceil} \left( \frac{j}{25} \right)}{2} = \text{ceil} \left( \frac{j-1}{25} \right), 1, -1 \right) \cdot E_{sw} + E_{sw} \right) - dE \right] \\ \text{potII}_j &:= (E_{sII} + E_{sw}) + \left[ \left( \text{ceil} \left( \frac{j-1}{25} \right) \cdot dE + \text{if} \left( \frac{\text{ceil} \left( \frac{j}{25} \right)}{2} = \text{ceil} \left( \frac{j-1}{25} \right), 1, -1 \right) \cdot E_{sw} + E_{sw} \right) - dE \right] \end{aligned}$$

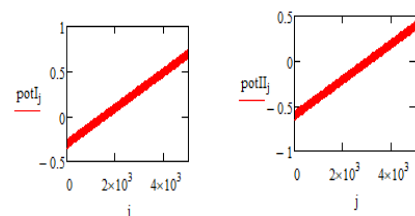

$$\Phi_{I_j} := n \frac{F}{R \cdot T} \cdot \text{potI}_j \quad \Phi_{II_j} := n \frac{F}{R \cdot T} \cdot \text{potII}_j$$

$$\Psi_{I_1} := \frac{K1 \cdot e^{\alpha_1 \cdot \Phi_{I_1}}}{1 + K1 \cdot K_{chem1} \cdot A_1 \cdot e^{-\alpha_1 \cdot \Phi_{I_1}} \cdot \left( 1 + e^{-\Phi_{I_1}} \right)}$$

$$\Psi_{II_1} := \frac{K_{chem1} \cdot e^{-\alpha_2 \cdot \Phi_{II_1}} \cdot \Psi_{I_1} \cdot A_1}{1 + K2 \cdot A_1 \cdot e^{\alpha_2 \cdot \Phi_{II_1}} \cdot \left( 1 + e^{-\Phi_{II_1}} \right)}$$

$$\Psi_{I_1} = 8.082 \times 10^{-6}$$

$$\Psi_{II_1} = 0$$

$$\frac{f_{sw}}{D} := 10$$

$$K1 := 100$$




$$K2 := 200$$

$$K_{chem1} := \frac{ks_1}{(D \cdot f)^{0.5}}$$

$$K2 := \frac{ks_2}{(D \cdot f)^{0.5}}$$

$$K_{chem1} := \frac{kc_1}{f}$$

$$K_{chem2} := \frac{kc_2}{f}$$



Meaning of the symbols of defined parameters:

-**kc<sub>1</sub>** and **kc<sub>2</sub>** are the rate constants of first and second regenerative step, respectively

-**Kchem1** and **Kchem2** are dimensionless chemical (regenerative) parameters related to the first and second regenerative step, respectively

-**K1** and **K2** are dimensionless rate parameters related to the first and second electron transfer step, respectively

-**ks<sub>1</sub>** and **ks<sub>2</sub>** are standard rate constants of first and second electron transfer steps, respectively

-**Φ<sub>I</sub>** and **Φ<sub>II</sub>** are dimensionless potentials

-**D** is symbol for the diffusion coefficient (assumed to be identical for all redox active species involved in the mechanism)

-**j** is serial number of time increments

$A_j, B_j$  are numerical integration parameters

-**n** is number of electrons exchanged

-**dE** is potential step

-**E<sub>sw</sub>** is square-wave amplitude

-**f** is SW frequency

-**E<sub>sI</sub>** and **E<sub>sII</sub>** are standard potential of first and second electron transfer step, respectively

-**α<sub>1</sub>** and **α<sub>2</sub>** are electron transfer coefficients related to the first and second electron transfer step, respectively

-**F**, **R** and **T** are Faraday constant, Gas constant and temperature, respectively

-**pot<sub>I</sub>** and **pot<sub>II</sub>** are potential modulations related to the first and second electron transfer step, respectively

-**Ψ** is symbol for the dimensionless current

**Entire simulation protocol for calculating square-wave voltammograms in Mathcad is available for free in:**

Gulaboski, R.; Mirceski, V. J. Solid State Electrochem. Square-Wave Voltammetry of Two-Step Diffusional Electrode Mechanism Coupled with a Reversible Follow-Up Chemical Reaction. *J. Solid State Electrochem.* **2021**, *25*, 2893-2901. <https://doi.org/10.1007/s10008-021-05027-4>

**30 days free trial version of Mathcad available at:**

<https://support.ptc.com/products/mathcad/mathcad-15-0/free-trial?refid=cadventure>

$$\Psi_I^j = \frac{K1 \cdot e^{\alpha1 \cdot \Phi I_j} \left[ 1 - \frac{1 + e^{-\Phi I_j}}{\sqrt{Kchem1}} \sum_{i=1}^{j-1} (\Psi_{I_i} \cdot A_{j-i+1}) \right]}{1 + K1 \cdot \frac{1}{\sqrt{Kchem1}} \cdot A_1 \cdot e^{\alpha1 \cdot \Phi I_j} (1 + e^{-\Phi I_j})}$$

$$\Psi_{II}^j = \frac{K2 \cdot \frac{1}{\sqrt{Kchem1}} \cdot e^{\alpha2 \cdot \Phi II_j} \sum_{i=1}^j (\Psi_{I_i} \cdot A_{j-i+1}) - \frac{1}{(\sqrt{Kchem2})} K2 \cdot e^{\Phi II_j \cdot \alpha2} \sum_{i=1}^{j-1} (\Psi_{II_i} \cdot B_{j-i+1}) - \frac{1}{(\sqrt{Kchem2})} K2 \cdot e^{-\Phi II_j \cdot (1-\alpha2)} \sum_{i=1}^{j-1} (\Psi_{II_i} \cdot B_{j-i+1})}{1 + \frac{1 \cdot B_1}{(\sqrt{Kchem2})} K2 \cdot e^{\Phi II_j \cdot \alpha2} + \frac{1 \cdot B_1}{(\sqrt{Kchem2})} K2 \cdot e^{-\Phi II_j \cdot (1-\alpha2)}}$$

$$\Psi_j = \Psi_I^j + \Psi_{II}^j$$

$$p = 1 \cdot \left( \frac{\Delta E}{dE} \right) - 1$$

$$\Psi_{If}_p = \Psi_{I(p+1) \cdot 50} \quad \Psi_{Ib}_p = \Psi_{I50 \cdot p+25} \quad \Psi_{Inet}_p = \Psi_{If}_p - \Psi_{Ib}_p$$

$$\Psi_{IIb}_p = \Psi_{II50 \cdot p+25} \quad \Psi_{IIIf}_p = \Psi_{II(p+1) \cdot 50} \quad \Psi_{IIInet}_p = \Psi_{IIIf}_p - \Psi_{IIb}_p$$

$$E_p = E_{sl} + p \cdot dE$$

$$\Psi_{b}_p = \Psi_{50 \cdot p+25} \quad \Psi_{f}_p = \Psi_{(p+1) \cdot 50} \quad \Psi_{net}_p = \Psi_{f}_p - \Psi_{b}_p$$

